
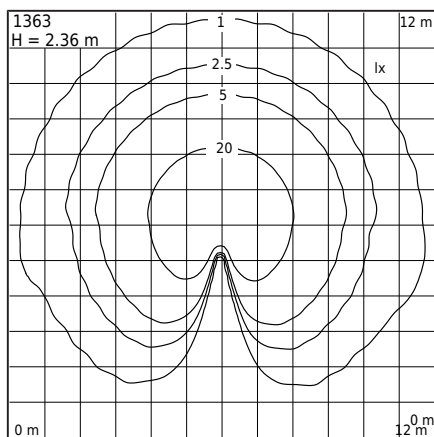
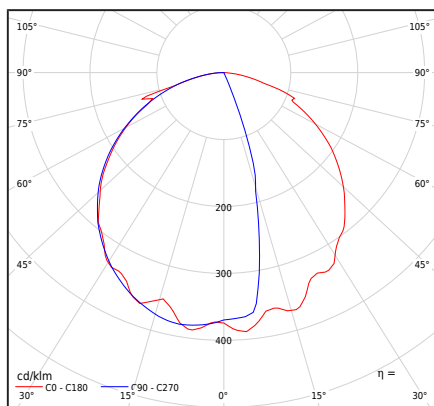


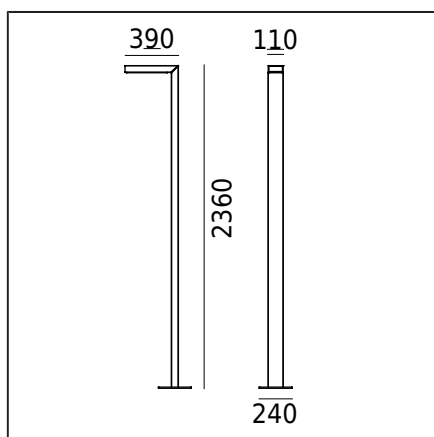

Type of luminaire

Type of luminaire	Pole luminaire (light construction).
Photometric body	Single-sided, symmetric light facing down.
Characteristics of the luminaire	For lighting private areas and other architectural concepts

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Mounting of the luminaire: 4 holes $\varnothing 12\text{mm}$, spacing 200x200mm Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm ² Possibility to connect the luminaire in loops of max 3x2,5mm ² Round insulated cable with a maximum diameter of $\varnothing 12,5\text{mm}$
Type of light source	LED module, power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	11kg / 17,05kg
Box dimensions [cm]	26x240x53
Side area of luminaire	0,258m ²

Technical data

2 LED modules	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	TCI Mini MD 12,5W 250mA code 127036 Triac (Datasheet)
Light source wattage	10,6W
Luminaire wattage	12W
Lamp luminous flux	1988lm
Luminaire luminous flux	1128lm
Light source efficiency	187,5lm/W
Efficiency of the luminaire	94lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>72 000h
Power Factor luminaire	PF 0,95
THD factor	10%
Ta Rated temperature	+25°C
Max ambient temperature	+40°C

This product contains light sources of energy efficiency class **A** / **C** / **EPREL**

Optionally, the luminaire is also available:

- In the safety class for KL II
 - For the LED color 2700K [1/1]
 - For a different value of the luminous flux
 - For a different color of the fitting (according to the RAL color palette)
- Terms of sale and other information, after contact with the Sales Department of Norlys

Inrush current	2A / 50 μ s
----------------	-----------------

Accessories sold separately

116ZX0009	Concreting anchor (anchor L190mm)
117GA0009	Ground anchor
2951ZX0009	Connection box IP68, cable max 3x4mm ² , possibility of connecting the luminaire in loops. Round insulated cable with a diameter of $\varnothing 7...13,5\text{mm}$

Spare parts

ZS1363zx0011	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	



Indexes

Index	Color	RAL
1363AL	ALUMINIUM	9006
1363B	BLACK	9005
1363GR	GRAPHITE	7016